4 MP Fixed Dome IP-Camera 2.8~12 mm

GU-CI-AT4634V



Type: Fixed Dome - IP - Camera
Item Code: GU-CI-AT4634V
EAN CODE: 4260573067121

SMART-PRO

The SMART-PRO product line offers versatile solutions with unique and unparalleled features.

Highlights

Ultra Low Light

Designed for unparalleled performance in low-light environments, this camera incorporates advanced image processing and a high-capacity image sensor, ensuring exceptional image quality even in ultra-low light conditions.

H.265+

H.265pro+ utilizes the standard H.265/High Efficiency Video Coding (HEVC) format, but boasts advanced technologies that enable it to substantially reduce the necessary transmission bandwidth and storage capacity for maximum efficiency.

Object Classification

This technology employs a highly advanced deep learning algorithm that can discern whether the alarm was triggered by a human, a vehicle or some other object.

Deep Learning

Deep Learning is inspired by the complex structure of the human brain. This innovative method allows processing of information and performing corresponding actions based on analysis.

Features

- Reduction of unwanted alarms (false alarms) by classifying target objects using deep learning algorithms. This significantly reduces false alarms generated by objects other than people or vehicles. This makes finding events easier and saves hard drive capacity
- Built-in Microphone & Speaker
- White light flash and audible alarm deterrent function
- Many AI functions integrated such as face detection, intrusion detection, object counting, queues, heat map and much more
- Excellent low-light performance

Active Deterrence

The Active Deterrence system helps deter potential intruders at an early stage. Thanks to built-in light sources and/or speakers, possible criminal activities can be prevented before they occur. Depending on the scenery, cameras with either a white or a red-blue light source are available. With its integrated deep-learning algorithm, the system can reliably identify individuals. If an intrusion alarm is triggered, it not only sends an alert but also delivers the corresponding video footage directly to a mobile device in real-time.

NDAA compliant

GRUNDIG Security's SMART line is fully compliant with the National Defense Authorization Act (NDAA), which prohibits U.S. federal agencies and their partners from using video surveillance and telecommunications equipment or services from certain Chinese companies. This law is part of the John S. McCain NDAA and is effective August 2020.
With our SMART product line, you can be confident that your security system complies with this important regulation. Our products meet the highest standards of quality and reliability, providing you with the security you need to protect your assets and personnel.

Specifications GU-CI-AT4634V


Camera	
Image Sensor:	1/1.8" progressive Scan CMOS
Video Resolution:	2688 × 1520
Sensitivity Colour:	0.0007 Lux @ F1.2 (AGC ON)
Sensitivity B/W:	0 Lux LED IR on
Shutter Speed:	1/5 ~ 1/20000 s
Slow Shutter:	Support
White Balance:	Auto, Manual
Lens	
Lens Focal Length:	2.8 ~ 12 mm motorized varifocal, autofocus
Iris F-Number:	F1.2
Lens Drive Type:	Fixed Iris
Focus Adjustment:	Auto- Focus, Manual - Focus
Optical Zoom Ratio:	4x
Field of View:	113° ~ 48° (horizontal), 59° ~ 27° (vertical), 139° ~ 55° (diagonal)
Illuminator	
Max. IR Distance:	Up to 40 m
White Light Distance:	Up to 25 m
White LED:	yes
Video	
Col/B&W:	Auto , Color , B&W, IR-cut filter removable (ICR)
Wide Dynamic Range:	120 dB
Image Enhancement:	BLC, 3D DNR, Defog, HLC
Image Settings:	Corridor mode, Saturation, Brightness, Contrast, Sharpness and white balance adjustable by client software or web browser
Day/Night Switch:	Support auto, scheduled, day, night
Privacy zones:	6 zones, rectangle
Audio	
Audio Compression:	G.711

General	
Log File Support:	Events, macros, changes, activities per user (not erasable by resetting the camera to factory settings)
DRI Range:	Tele: Detection: 128.7 m, Observation: 51.5 m, Recognition: 25.7 m, Identification: 12.9 m Wide: Detection: 60.4 m, Observation: 24.2 m, Recognition: 12.1 m, Identification: 6 m DORI (Detect, Observe, Recognize and Identify) is a standard system (EN-62676-4) for defining the ability of a person viewing the video to distinguish persons or objects within a covered area. The numbers in this table do not reflect intelligent function distances.
Frame Rate	
Main Stream:	50 Hz: 25 fps (2688 × 1520, 2304 x 1296, 1920 × 1080) 60 Hz: 30 fps (2688 × 1520, 2304 x 1296, 1920 × 1080)
Sub- Stream:	50 Hz: 25 fps (1920 x 1080, 1280 x 720, 640 x 480) 60 Hz: 30 fps (1920 x 1080, 1280 x 720, 640 x 480)
3rd Stream:	50 Hz: 25 fps (640 x 480, 320 x 240) 60 Hz: 30 fps (640 x 480, 320 x 240)
Network	
Functions:	One-key reset, anti-flicker, three streams, mirror, password protection, privacy mask, IP-address filter
Video Compression:	H.264, H.264+, H.265, H.265+ , MJPEG
Bit Rate:	256 Kbps to 16 Mbps
Bitrate control:	Constant Bitrate (CBR), Variable Bitrate (VBR)
Streaming Method:	Unicast, Multicast
SD Memory:	Micro SD/SDHC/SDXC card slot with ANR (up to 256G), NAS (Support NFS, SMB/CIFS)
Client software:	C-WERK Viewer, Smart-Line Client PC-Software, IOS App, Android App (GSVM)
Web Browser:	Plug-in required live view: IE10/IE11 Non Plug-in live view: Chrome 57+, Mozilla Firefox 52+, EDGE 89+ Local Service: Chrome 57+, Firefox 52+, EDGE 89+
Web Browser:	Safari V12.1+, Mozilla Firefox V.52+, Google chrome V.57+, MS Edge V.79+
Network Protocol:	TCP/IP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, NTP, UPnP, SMTP, SNMP, 802.1X, IPv4/IPv6, PPPoE
Cyber Security:	2 levels of user management: admin, user, AES Encryption for Password Protection, password change prompt at first startup, Complicated Password, HTTPS (SSL) Login Authentication, Basic and digest authentication for HTTP/HTTPS, 802.1X authentication , (EAP-LEAP), 802.1X authentication (EAP-TLS), Watermark, IP Adress Filter, WSSE and digest authentication for ONVIF, SNMP V2 , SNMP V3, TLS 1.0, TLS 1.1, Brute Force Delay Protection of 300s after 5 login attempts, Signed Firmware, Secure Boot by hardware check
I/O Interface	
Audio Input/Output:	1 Input: line in or mic in & built-in microphone, 1 Output: line out & built in speaker, mono sound
Alarm Input/Output:	1 alarm-input, 1 alarm-output
Network Interface:	1x 10, 100 Base T, TX PoE (RJ-45)
Intelligent Functions	
Audio Detection:	Detects unusual noises: dogs barking, babies crying, gunshots, sudden sound increase and decrease
Crowd Density:	Counts people in a predefined area. The area, the maximum number of people in it can be set
Deep Learning Analytics:	Face Capture, Line crossing detection, intrusion detection, region entrance detection, region exiting detection, human, vehicle
Face Detection:	Face recognition in real time and instantly match them against a watchlist
Face Recognition:	Detects and recognizes faces by comparing them to stored portrait images. Actions can be triggered via the allowed, blocked and other list


Intelligent Functions	
Dynamic face masking:	Supports dynamic mosaic mask
Fall detection:	Fall detection is an AI-powered system that analyzes live video from security cameras to automatically recognize when a person falls. It identifies unusual body posture changes, rapid downward movement, or loss of balance, then triggers alerts so responders can act quickly—without requiring any wearable devices.
Fire Detection:	Detects fire in the image scene
Heat Map:	Visualizes the number of people in the surveillance area over a period of time with a simple and user-friendly color scheme
Object Classification:	Detects people, non-motorized vehicles and/or vehicles in full screen or a defined image section
Intrusion Detection:	People, motorized vehicles or non-motorized vehicles, enter, exit or drive over a predefined virtual area, up to 4 rules are supported
License Plate Recognition:	Detects and recognizes car number plates. (Data- import- export function, actions can be triggered via the allowed, blocked and other list, only supported with insert SD-Card).
Object Counting:	Entrance and Exit object number is accounted and showed on screen in real time
Line Crossing:	People, motorized vehicles or non-motorized vehicles cross a pre-defined virtual line, up to 4 rules are supported
Object Removal:	Detects within a predefined, adjustable area objects that were originally placed in a specific location and have been removed, as well as objects that have been left behind there
People & Vehicle Detection:	Adjustable whether people, motorized or non-motorized vehicles should be detected.
Queue Length:	Counts people in a predefined area and measures service time. The area, the maximum number of people in it and the maximum service time can be set
Motion Detection:	On, Off, Area Setting, Sensitivity
Region Entrance:	Enter a pre-defined virtual region from the outside place
Region Exiting:	Exit from a pre-defined virtual region
Sound Alarm:	A siren or freely configurable voice output can be triggered upon an event.
Tamper Protection:	Scene change and defocus
Multi-target-type Detection:	Supports the detection of a wide range of objects, person attributes, animals, and vehicles.
Visual Alarm:	Red & Blue light alarm with adjustable flashing frequencies
Limits of intelligent functions:	Only Intrusion Detection, Area Entrance, Area Exit, Line Crossing and Heat Meap can be used simultaneously.
Event Source:	Video tampering, network disconnected, IP address conflicted, motion, various AI functions, sudden audio increase-decrease
Event Action:	Send e-mail, trigger alarm output, push notification for GSVM App and C-WERK, upload to FTP/Cloud, trigger HDD recording and/or image capture, show message on screen, PTZ linkage, voice prompt, buzzer
Approvals	
Protection Rating:	IP67 (IEC 60529-2013), IK10 (IEC 62262:2002), NEMA 4X (NEMA 250-2018)
Regulation:	CE, FCC, RoHS Compliant
Standard:	ONVIF (Profile S, Profile G, Profile T, Profile M), SDK/API
MTBF at 25° C:	>60.000 hours
Environmental	
Operating Temperature:	-35 °C ~ 60 °C (-31 °F ~ 140 °F)
Humidity:	Less than 90%, non condensing
Electrical	
Supply Voltage:	12 VDC, PoE (IEEE 802.3af)
Power Consumption:	Max. 8.7 W

Mechanical	
Mount:	Pan: 0° to 360°, tilt: 0° to 90°, rotation: 0° to 360°, 3-Axis Adjustment
Dimensions:	Ø 149 x 115 mm (Ø5,85 x 4,5 inch)
Weight:	1350 g (2.98 lb)
Packaging	
Package Dimensions:	150 x 155 x 180 mm (5.9 x 6.1 x 7.1inch)
Package Weight:	1200 g (2.6 lbs)
Packaging Unit:	8
Bulk Package Dimensions:	375 x 375 x 320 mm (14.8 x 14.8 x 12.6 inch)
Bulk Package Weight:	11500 g (25.4 lbs)

Accessories



GU-SW-INST-TOOL



GU-SW-VMS



GU-SW-IP-FINDER




GU-SW-PLAYER



GD-HW-SD-128GB



GD-HW-SD-256GB



GU-BR-AJX06



GU-BR-AJX07



GU-BR-AJX08



GU-BR-AMF01



GU-BR-AMW02




GU-BR-AMW05



GU-BR-ASN01

Dimensions

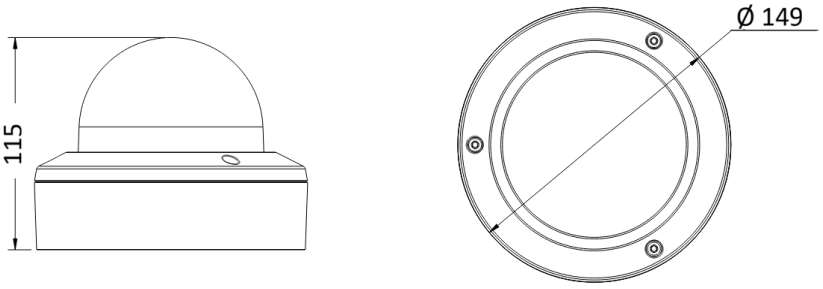

Guarantee

All cameras in the SMART-PLUS and SMART-PRO product lines have an extended warranty period of 5 years on electronic parts, mechanical wear and tear on moving parts is not included. Please note our general delivery terms and conditions.

NEMA 4X – Protection Standard for Demanding Environments

NEMA 4X is a protection standard defined by the American National Electrical Manufacturers Association, specifying requirements for enclosures housing electrical equipment. Compared to NEMA 4, NEMA 4X additionally provides corrosion resistance – a critical advantage in tunnels, car parks, coastal locations, industrial facilities with chemical exposure, and anywhere subject to regular high-pressure cleaning.
The standard covers protection against rain, snow, dust, corrosion, and inadvertent contact with live electrical components. Combined with IP66/IP67, NEMA 4X-rated cameras offer the highest level of protection for permanent outdoor deployment in the most demanding conditions.